


HEAVY DUTY AMERICAN DESIGN RECIPROCATING PISTON AIR COMPRESSOR

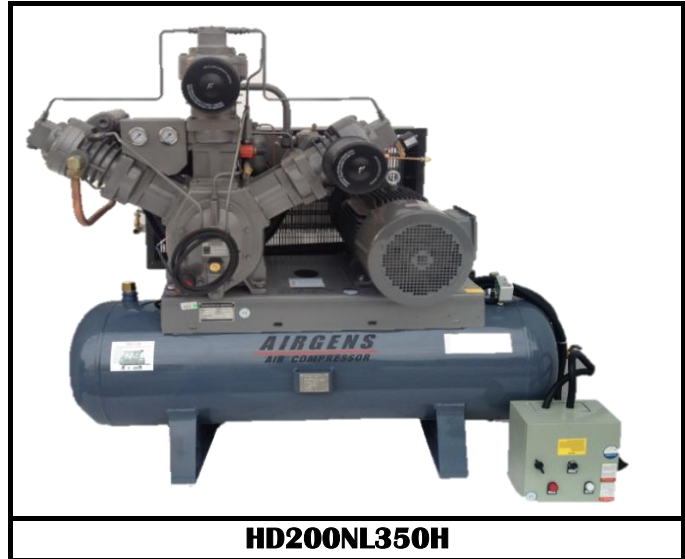

T-32 NON-LUBRICATED (OIL-FREE) 2 STAGE RECIPROCATING AIR COMPRESSOR

Model	Pump	Capacity		No. of Piston		Pressure		Displacement		Free Air Delivery		Tank
		Hp	kW	LP	HP	PSI	Bar	L / min	CFM	L / min	CFM	Volume
HD20NL150H	110	2.0	1.5	2		100	6.9	185	6.5	150	5.3	150
HD50NL150H	520	5.0	3.7	1	1	130	9.0	627	22.1	510	18.0	150
HD75NL230H	520	7.5	5.5	1	1	130	9.0	801	28.3	651	23.0	230
HD100NL230H	520	10.0	7.5	1	1	130	9.0	1115	39.4	906	32.0	230
HD150NL350H	1030	15.0	11.0	2	1	130	9.0	1533	54.1	1,246	44.0	350
HD200NL350H	1030	20.0	15.0	2	1	130	9.0	2020	71.3	1,642	58.0	350

AIRGENS - HEAVY DUTY AIR COMPRESSOR FEATURES AS FOLLOWS:

- ➔ INDIVIDUAL CAST IRON CYLINDER WITH RADIAL FINS
- ➔ EFFICIENT AIR-COOLED FINNED INTER-COOLER AND AFTER-COOLER
- ➔ DUAL CONTROL AUTO-START/STOP OR LOAD/UNLOAD CONTROL
- ➔ HEAT TREATED STAINLESS STEEL CONCENTRIC RING VALVES
- ➔ LOW OIL LEVEL SWITCH PROTECTION

Note: Due to constant engineering improvements, designs and specifications are subject to change without prior notice.

- * Direct On Line Starter for Compressor 10HP and below and Star-Delta Starter for Compressor 15HP and above as standard.
- * Base plate (Skid-mounted) units and Duplex Compressor is also available upon request.
- * Airgens Non Lubricated Compressor comes complete with Semi-enclosed wire beltguard.
- * Built In Air-cooled After-cooler for Compressor 15HP and above as standard.
- * Unique NL Cylinder Design with Pressurized piece that keeps Crankcase Oil OUT.